
Document ID: 1937691 Page 1 of 1

2009 HUMMER H2 | H2 (VIN N) Service Manual | Driver Information and Entertainment |
Cellular, Entertainment, and Navigation | Repair Instructions | Document ID: 1937691

Communication Interface Module Replacement



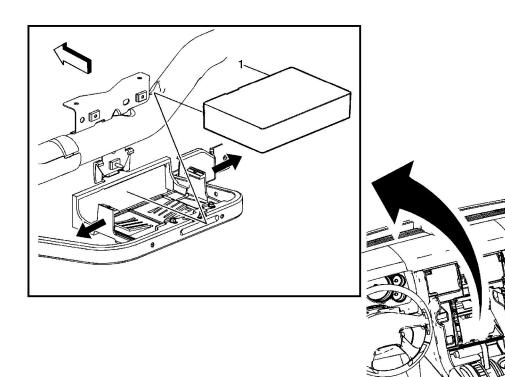

Callout Component Name

Preliminary Procedure

Remove the radio. Refer to Radio Replacement.

Communication Interface with Mobile Telephone Transceiver Module

Procedure

1

- 1. Push outward on the two tabs to release the communication interface module from the bracket.
- 2. Disconnect the electrical connectors.
- 3. Reprogram the communication interface module after replacement. Refer to Control Module References.
- 4. When replacing the communication interface module be sure to transfer Bluetooth Antenna, if equipped.

© 2012 General Motors Corporation. All rights reserved.