


Communication Interface Module Replacement

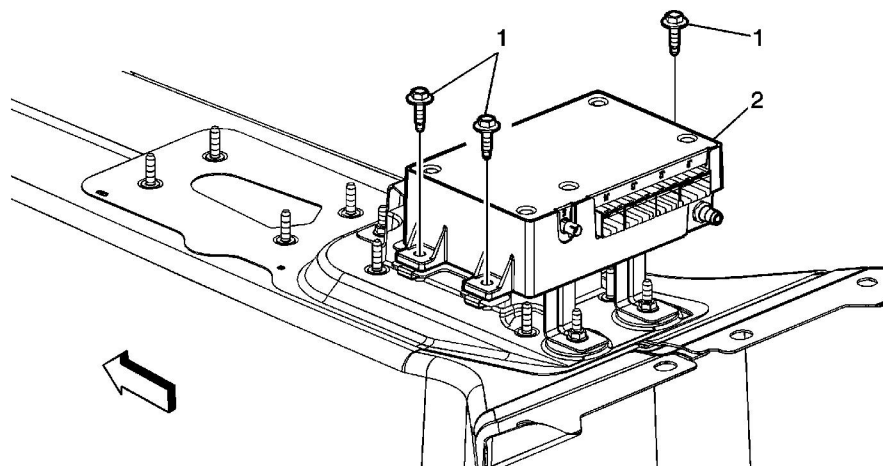

Callout	Component Name
Preliminary Procedures <ol style="list-style-type: none"> 1. Remove the rear window panel trim. Refer to Rear Window Panel Trim Replacement. 2. Program the communication interface module (OnStar®) after replacement. Refer to Control Module References. 3. When replacing the communication interface module be sure to transfer Bluetooth Antenna, if equipped. 	
1	Communication Interface Module Bracket Bolt/Screw Caution: Refer to Fastener Caution in the Preface section. Tighten 10 N·m (89 lb in)
2	Communication Interface Module Assembly